





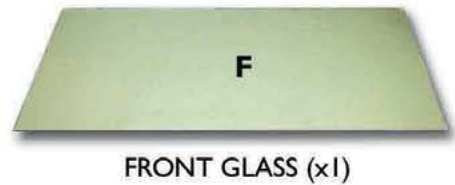

TOOLS NEEDED

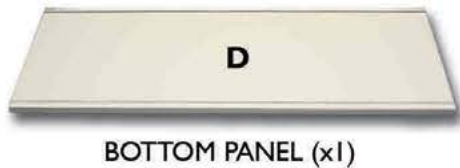

NOTE: It is recommended that two persons assemble this unit.

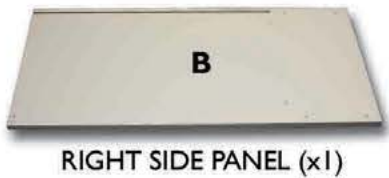

1.

BASE ASSEMBLE

- BOTTOM PANEL (x1)
- TOE KICK (x2)
- #10 CAM LOCK (x16)
- BOLT (x4)
- GLID (x4)





2.

SIDE PANEL AND FRONT GLASS ASSEMBLE

- LEFT SIDE PANEL (x1)
- RIGHT SIDE PANEL (x1)
- BOLT (x12)
- FRONT GLASS (x1)



1. Connect toe kick panel with bottom panel using bolts.
2. Insert and tighten #10 cam lock.
3. Attach glides to the toe kick.

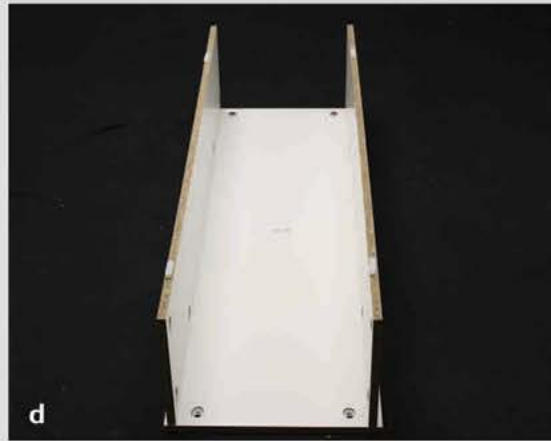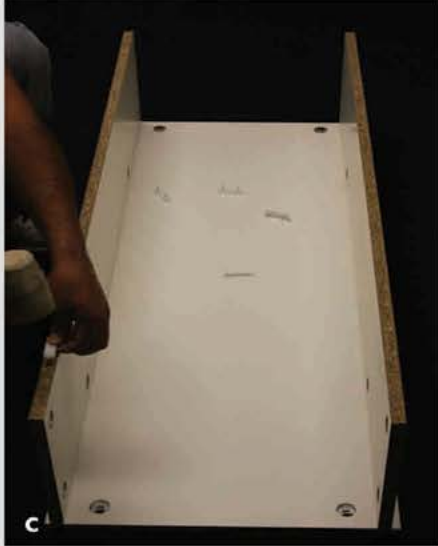

1. Attach assembled base to right panel; tighten.
2. Insert front glass.
3. Attach left side panel to assembled base; tighten.
4. Sit showcase on floor.



3.

ALUMINUM EXTRUSION RAIL ASSEMBLE

U CHANNEL (x6FT) #6 x 158 PHILLIPS SCREW (x6)
 AK0312 (x1) FELT (x12FT)
 AK0313 (x1) #12 SCREW CAP (x6)
 AK0314 (x1)



4.

STANDARD ASSEMBLE

SS27CD (x3)
 #6 x 34 PHILLIPS SCREW (x3)
 #6 x 12 PAN SCREW (x6)



5.

GLASS SHELF & TOP GLASS ASSEMBLE

- BT8C (x3)
- BT10C (x3)
- 8" SHELF GLASS (x1)
- 10" SHELF GLASS (x1)
- TOP GLASS (x1)



6.

DOOR PANEL ASSEMBLE

- DOOR PANEL (x2)

1. Insert doors on showcase.



1. Place BT8C & BT10C on SS27CD with proper height.
2. Place 10" glass shelf on BT10C; put 8" glass shelf on BT8C.
3. Gently sit top glass on the top frame.

