
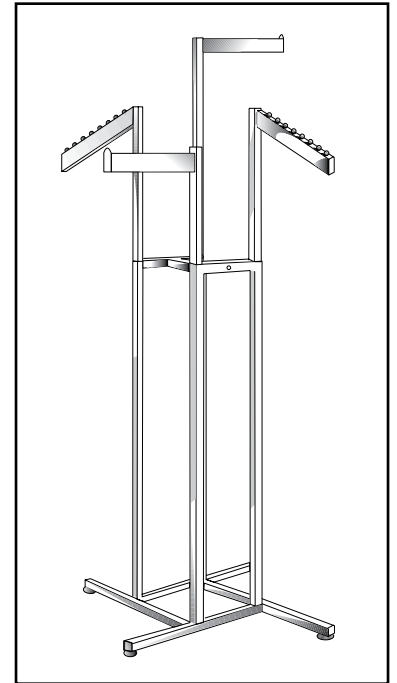


- 1) Remove screws from leg/bar ends
- 2) Assemble frame per photo
- 3) Face all holes in frame arms to the inside
- 4) Tighten screws
- 5) Adjust leveling feet

***PLEASE NOTE:** Due to the high weight of product, please tighten screw securely to insure rack stability.

T - Bolt

Note: Holes in frame for arms always go to the inside.

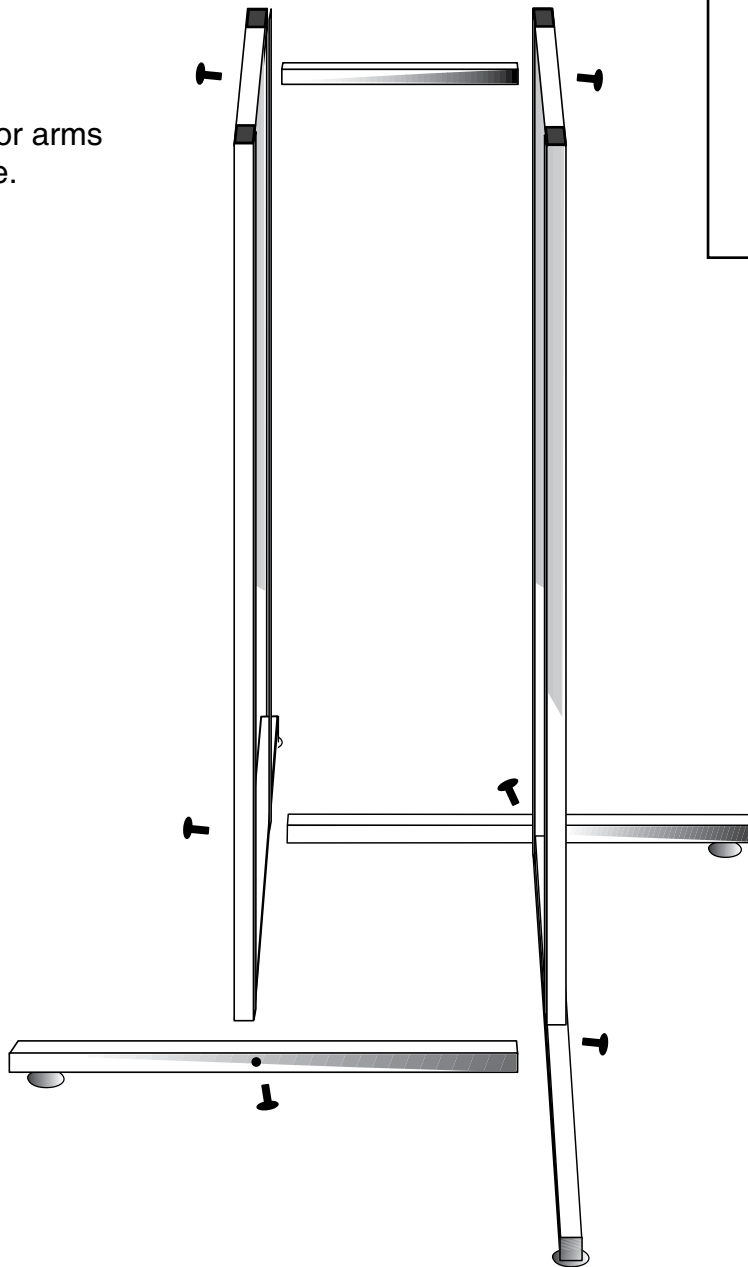

Completed Rack